


Sidac High Voltage Bidirectional Triggers 2A Mperere RMS

硅高压双向触发二极管
峰值工作电流 2A

特征 Features

- 高压钠灯触发器 High pressure Sodium Vapor Lighting
- 高压调整器 High Voltage Regulators
- 脉冲发生器 Pulse Generators
- 代替可控硅 Used to Trigger Gates of SCR's and Triacs
- 无铅器件 These are pb free Devices*
- LDE灯保护 LED lamp protection

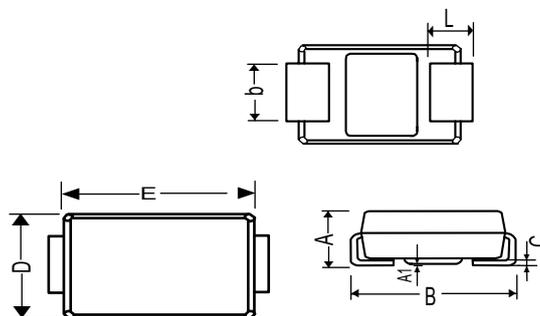

SMB

UNIT:mm

	A	E	D	B	A1	L	C	b
max	2.5	4.7	3.94	5.5	0.21	1.5	0.305	2.2
min	2.1	4.06	3.3	5.0	0.05	0.8	0.152	1.9

机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 安装位置: 任意 Mounting Position: Any



极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Rating	符号 Symbols	K220	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage (Sine Wave, 50 to 60 Hz, T _J = -40 to 125°C)	V _{DRM} V _{RPM}	±180	V
开态均方根电流 On-state RMS current (T _L = 80°C, Lead Length = 3/8", All Conduction Angles)	I _{T(RMS)}	±2	A
最大浪涌电流 Peak Non Repetitive Surge Current (60 Hz One Cycle Sine-wave, T _J = 125°C)	I _{TSM}	±20	A
工作温度 Operating Junction Temperature Range	T _J	-40 to +125	°C
储存温度 Storage Temperature Range	T _{stg}	-40 to +125	°C
典型热阻 Thermal Resistance, Junction-to-lead (LEAD LENGTH = 3/8")	R _{θJA}	15	°C/W
焊接温度 Lead Solder Temperature (Lead length ≥ 1/16" from Case, 10s Max)	T _L	275	°C

电特性 TC = 25°C 除非另有规定。

ELECTRICAL CHARACTERISTICS (TC = 25°C unless otherwise noted;Electricals apply in both directions)

电特性 Characteristic	符号 Symbols	K220	单位 Unit
转折电压 Breakover Voltage, $I_{BO}=200\mu A$	V_{BO}	Min 205	V
		Max 235	
反向漏电流 Repetitive peak Off-State Current (50to60Hz Sine Wave)	I_{DRM}	10 ($V_{DRM}=90\%V_{BO}$)	μA
转折电流 Breakover Current	I_{BO}	200	μA
通态峰值电压 Peak On_State Voltage ($I_{TM}=1A$ Peak, Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$)	V_{TM}	Typ 1.5 Max 2.0	V
动态维持电流 Dynamic Holding Current (Sine Wave, 60Hz, $R_L=100\Omega$)	I_H	Typ 60	mA
切换电阻 Switching Resistance (Sine Wave, 50to60Hz)	R_s	0.1	K Ω
电流上升率 Critical rate_of_rise of on_state Current, Critical Damped Eaveform Circuit ($I_{PK}=130\Omega$, Pulse Width=10 μsec)	di/dt	120	A/ μS

硅高压双向触发二极管的特性曲线

Voltage Characteristic Characteristic of SIDAC (Bidirectional Device)

